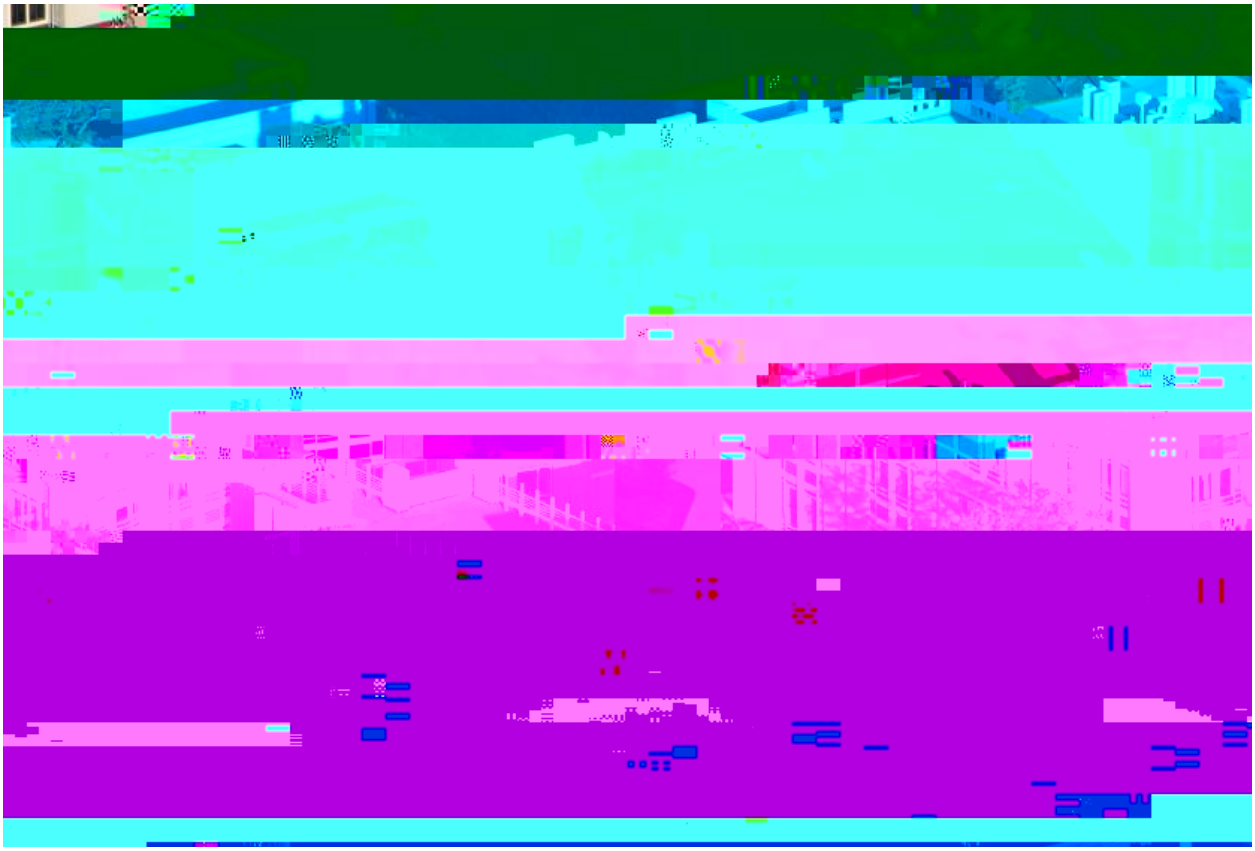

Safety Program Objectives.....6

Basic Safety Rules.....6

Special Procedures and Work Permits.....7

Hazard Communication and Chemical Safety 6

Asbestos containing Materials..... 8

Lead Awareness..... 8

Emergency Procedures....14
Accidents....14
Manual Materials Handling....14
Enforcement....14
General Safety Procedures....15
OSHA General Duty Clause....15
General Inspections and Training....15
Medical Services and First Aid....15
Hand and Power Tools....16
Personal Protective Equipment....16
Eye and Face Protection....16
Head Protection....17
Hearing Protection....17
Respiratory Protection....17
Gases, Vapors, Fumes, Dusts and Mists....18
Electrical....18
Fire Protection....20
Flammable and Combustible Liquids....20
Welding, Cutting and Heating....20
Liquefied Petroleum Gas....22
Housekeeping....22
Storage....22
Ladders....23
Flagpersons....23
Motor Vehicles and Mechanized Equipment....24

Railings.....24

Scaffolds..... 25

Air Tools..... 26

Compressed Air..... 26

Compressed Gas Cylinders..... 26

Hoists and Cranes..... 27

Accident Record Keeping and Reporting Requirements..... 27

I. SAFETY PROGRAM OBJECTIVES

Safety and health programs strive to protect people, property, the environment, and must comply with governmental regulations. The objective of this guidebook is to assist in providing a safe environment for employees, students, visitors and construction workers in all areas during maintenance, renovation or new construction projects.

Major objectives of a contractor's safety and health program are to:

1. Protect employees, students, visitors, property, and environment from potential hazards.

2. Provide a safe and healthful workplace free from recognized hazards.

3. Comply with all governmental safety, health, environmental standards and University policies.

4. Maintain an effective health and safety program, which includes managers, supervisors, and employees.

5. Cooperate with building occupants and others involved in the work area to maintain a safe and healthful workplace.

II. BASIC SAFETY RULES

1. Vehicles must observe the posted speed limit. Unless otherwise posted, there is a campus wide speed limit of 5 mph.

2. Obey all posted warnings.

3. Smoking is permitted in designated areas only.

4. Fighting or horseplay is prohibited on Marquette University property.

5. Firearms are not allowed on Marquette University property.

6. Contractors must remain in designated areas at all times and use approved travel routes into and out of site and campus.

- Employee training.

e. **Asbestos containing materials.** Upon discovery of materials that may contain asbestos (Presumed Asbestos Containing Material, PACM) the Contractor should contact the Project Manager/ Construction Coordinator. The Project Manager/ Construction Coordinator will arrange for testing. Upon discovery of PACM the contractor shall not disturb the areas containing the PACM.

f. **Lead awareness.** Before operations on any paint that may contain lead, the contractor should contact the Project Manager/ Construction Coordinator to arrange for testing.

g. **Fluorescent light bulbs & PCB containing ballasts disposal.**
   1.) Personnel removing fluorescent light bulbs are responsible for examining the bulb to determine if the bulb should be recycled due to mercury vapor & lead content and making sure the bulbs are moved to a central collection point. Bulbs should be packaged and labeled according to Universal Waste requirements. Personnel removing fluorescent ballasts are responsible for examining the ballast to determine if it contains PCBs (Polychlorinated Biphenyls), removing any PCB containing ballasts from the fixture, placing each ballast into proper containers, labeling the container to indicate that it contains PCBs and making sure the containers are moved to a central collection point.

h. **Plumbing work.** If liquid mercury is discovered in plumbing, stop working, notify the Project Manager. Contractor plumbers should be trained in bloodborne pathogen awareness. If employee exposure to human blood and/or body fluids is anticipated, contractor employees must have documentation of Hepatitis B vaccination or declination form.

2. Hot Work and

b. ***Rooftop work*** *may require a Hazardous Work Permit. The contractor will contact the Project Manager/ Construction Coordinator to initiate the Hazardous Work Permit at least one week before accessing the roofs.*

4. Underground Utility Location

a. Anyone proposing to excavate, dig, bore, tunnel, blast or disturb the earth in any manner which may damage buried utilities is required to call the Diggers Hotline and Private Lines (3 working days) before starting the proposed work. In the event of a **bona fide emergency**, notification may be made directly to the Department of Facilities Planning & Management.n.

5. Utility Service Interruptions

a. Before any work involving the planned or possible interruption of utilities such as electric, water, gas, or steam services, permission from the Department of Facilities Planning & Management is required. Contact Department of Facilities Planning & Management through your Project Manager/ Construction Coordinator.

approved fall protection devices must be properly trained concerning the need for and purpose of the protection. Also, they must be instructed in the proper use of the equipment and shall demonstrate that they know, understand, and can use the fall protection devices properly.

c. Supervisors shall ensure the use of fall protection devices as required.

11. Window Washing Anchor Certification

a. Contractors shall comply with OSHA Standard 29 CFR 1910.27. The contractor shall obtain in writing from the Project Manager

2. **EDUCATION AND TRAINING:** All managers, supervisors, and employees must be properly trained to recognize, evaluate, and control workplace safety and health hazards. No employee is allowed to perform a job until he or she has been properly trained to perform the job safely. Specific training must be provided concerning the safety rules and procedures pertaining to the jobs being performed. Safety and health training is to be conducted initially upon employment and at least annually thereafter. Frequent refresher training such as tool box safety talks should also be part of the training program.

3. **INSPECTIONS:** Contractors should perform frequent and regular safety inspections, normally at least weekly.

4. **EMERGENCY PROCEDURES:** All employees must know, understand, and be able to follow all workplace emergency procedures pertaining to their assignment. Call 8-1911 from a Marquette phone (or 414-288-1911 from a cellular phone) to contact Marquette University Police. Periodic tests, drills, audits, etc. must be conducted to verify employee knowledge and understanding of all emergency procedures.

V. GENERAL SAFETY PROCEDURES

The following General Safety Procedures apply to the entire workplace and should be followed by managers, supervisors and employees.

1. OSHA General Duty Clause

Hazardous conditions or practices not covered in an OSHA standard may be covered under Section 5(a)(1) of the Occupational Safety and Health Act of 1970 which states: “Each employer shall furnish to each of his employees employment and a place of employment which are free from recognized hazards that are causing or are likely to cause death or serious physical harm to his employees.”

2. General Inspections and Training

a. Contractors should designate a competent site-safety coordinator for each job site. The contractor’s site-safety coordinator should be identified to the Project Manager/ Construction Coordinator in the event that safety concerns regarding the worksite arise.

b. Contractors should initiate and maintain an inspection program to provide for frequent and regular self-inspections of the job site, materials, and equipment.

c. Contractors should instruct each employee in the recognition and avoidance of unsafe conditions and in the regulations applicable to his or her work environment and to control or eliminate any hazards or other exposure to illness or injury.

d. The use of any machinery, tool, material, or equipment which is not in compliance with any applicable requirements of OSHA standards is prohibited.

3. Medical Services and First Aid

a. A person trained to render first aid is to be available at the worksite.

b. Where the eyes or body of any person may be exposed to injurious corrosive materials, suitable facilities for quick drenching or flushing of the eyes and body shall be provided within the work area for immediate emergency use.

d. Employees exposed to laser beams shall be furnished suitable laser safety goggles that will protect for the specific wavelength of the laser and be optical density adequate for laser involved.

7. Head Protection

Head protective equipment (hard hats/ helmets) shall be worn in areas where there is a possible danger of head injuries from impact, flying or falling objects, or electrical shock and burns. Hard hats/ helmets shall meet the performance

c.

d. Equipment must not be operated closer than 10 feet to overhead energized power lines unless specific procedures are followed by qualified persons using appropriate protection equipment.

e. Extension cords used with portable electric tools shall be the 3-wire type, shall be protected from damage. Splices shall have soldered wire connections with insulation equal to the original. Worn or frayed cords shall not be used.

f. Bulbs on temporary lights shall be equipped with guards or deeply recessed in the reflector. Temporary lights shall not be suspended by their electric cords unless designed for suspension.

g. Receptacles for attachment plugs shall be of the approved concealed contact type. Where different voltages, frequencies, or types of current are supplied receptacles shall be of such designs that attachment plugs are not interchangeable.

c. All employees shall be instructed in the safe use of welding equipment prior to using this equipment.

d. Proper precautions (isolating welding and cutting, removing fire hazards from the vicinity, providing a fire watch, etc.) for fire prevention shall be taken where welding or other “hot work” is being done. No welding, cutting or heating shall be done where the application of flammable paints, or the presence of any other flammable compounds, or heavy dust concentration creates a fire hazard.

e. Arc welding and cutting operations shall be shielded by noncombustible or flameproof shields to protect persons from direct arc rays. Visual barrier screens are required for arc-welding operations.

f. When electrode holders are to be left unattended, electrodes shall be removed and the holder shall be placed or protected so that it cannot make electrical contact with employees or conducting objects.

g. All arc welding and cutting cables shall be completely insulated and be capable of handling the maximum current requirements for the job. There shall be no repairs or splices within 10 feet of the electrode holder except where splices are insulated equal to the insulation of the cable. Defective cables shall be repaired or replaced.

h. Fuel gas and oxygen hoses shall be easily distinguishable and shall not be interchangeable. Hoses shall be inspected at the beginning of each shift and shall be repaired or replaced if defective.

i. General mechanical or local exhaust ventilation or air line respirators shall be provided, as required, when welding, cutting or heating:
   - zinc, lead, cadmium, mercury, or beryllium-bearing, materials in enclosed spaces.
   - stainless steel with inert-gas equipment.
   - in confined spaces.
   - where an unusual condition can cause an unsafe accumulation of contaminants.

j. Proper eye protective equipment shall be provided when appropriate.

15. Liquefied Petroleum Gas (LP Gas)

a. Storage of LP Gas within buildings is prohibited.

b.

a. When signs, signals and barricades do not provide necessary protection on or adjacent to a highway or street, flag-persons or other appropriate traffic controls shall be provided.

b. Flag-persons shall be provided with and shall wear a red or orange warning garment while flagging. Warning garments worn at night shall be of reflective material.

20. Motor Vehicles and Mechanized Equipment

a. Observe posted speed limits, give pedestrians the right of way, and yield to emergency vehicles. Unless otherwise posted, there is a campus-wide speed limit of 5 miles per hour.

b. All vehicles in use shall be checked at the beginning of each shift to assure that all parts, equipment, and accessories that affect safe operation are in proper operating condition and free from defects. All defects will be corrected before the vehicle is placed in service.

c. No person shall use any motor vehicle, earth moving or compacting equipment having an obstructed view to the rear unless:
   - the vehicle has a reverse signal alarm distinguishable from surrounding noise level or
   - the vehicle is backed up only when an observer signals that it is safe to do so.

d. Heavy machinery, equipment, or parts thereof which are suspended or held aloft shall be substantially blocked to prevent falling or shifting before employees are permitted to work under or between them.

e. Park only in areas approved for contractor use.

21. Railings

a. A standard railing used to protect personnel from falls shall consist of top rail, intermediate rail, toeboard, and posts, and have a vertical height of approximately 42 inches from upper surface of top rail to the floor, platform, etc.

b.

d. Cylinders shall be kept at safe distances or shielded from welding or cutting operations. Cylinders shall be placed where they cannot become part of an electrical circuit.

e. Oxygen and fuel gas regulators shall be in proper working order while in use.

f. Applicable technical portions of American National Standards Institute, Z49.1, Safety in Welding and Cutting, shall be followed.

26. Hoists and Cranes

a. Comply with the manufacturer’s specifications and limitations for hoists.

b. Rated load capacities, recommended operating speeds, and special hazard warnings or instructions shall be posted on cars and platforms.

c.

I hereby acknowledge that I have received a copy of the Marquette University Contractor Safety, Health and Envir